


Briga-Jig Shelf System

Create A Convenient Workspace

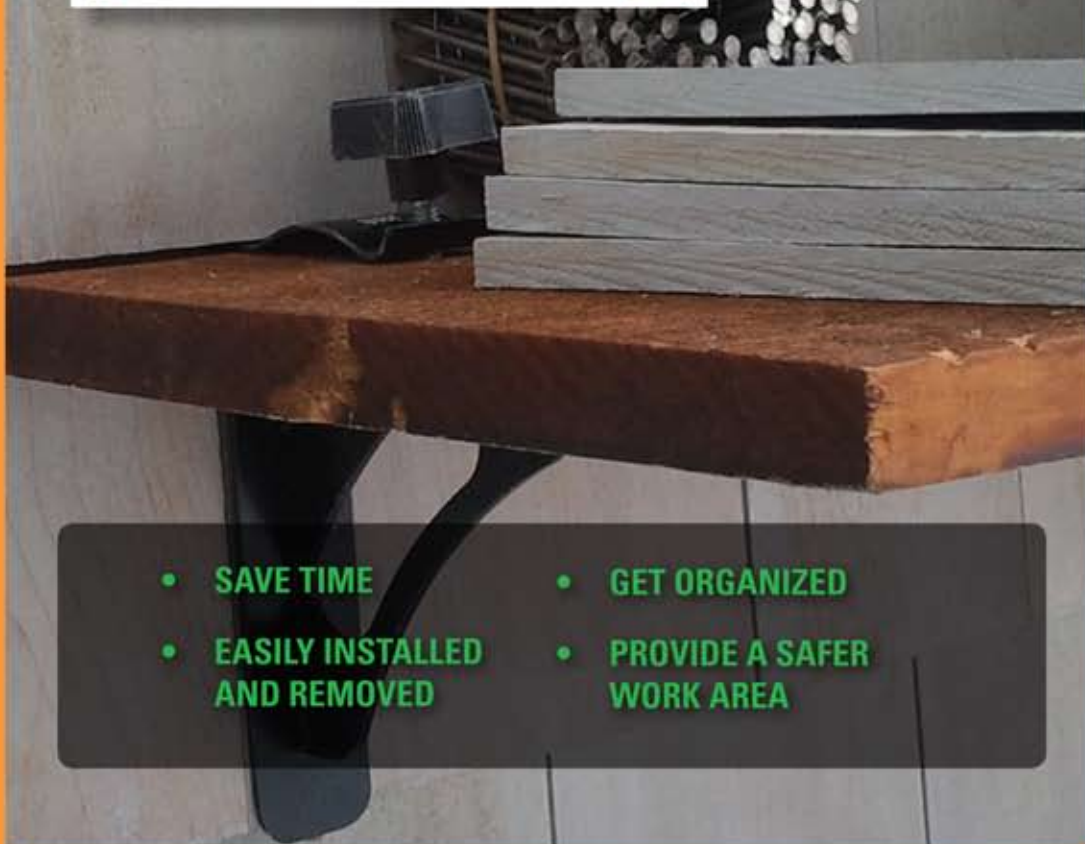

- **SAVE TIME**
- **GET ORGANIZED**
- **EASILY INSTALLED AND REMOVED**
- **PROVIDE A SAFER WORK AREA**

The shingle and shake shelf system is a temporary system which allows placement of light weight tools and stock, conveniently oriented to your work space. This creates not only a safer work space, but saves the installer the time of continuously restocking materials or retrieving tools.

- Saves valuable time
- Helps organize
- Provides a safer work situation
- Easily installed and removed
- A must have when working from staging and off ladders

INSTRUCTIONS

- Begin by choosing a $\frac{3}{4}$ -inch, lightweight shelf board of no more than 9 inches in width and 6 feet in length.
- Insert retention leg of first bracket up and behind a course of shingles until it hits the horizontal stop (Figure 1).
- Repeat Step 2 with second bracket down the course of shingles, slightly short of the length of your shelf board.
- Check each bracket to ensure they are secure by giving them a tug. If necessary, re-insert in another location.
- Insert shelf board into installed shelf brackets until it hits the back of the bracket.
- Lock shelf board into place with locking knob. Shelf will now hold up to 3 pounds without a nail. For loads of up to 10 pounds, a small nail can be installed at lower end of shelf bracket.
- Never overload shelf
- Never use as a step
- Never work with someone under you
- Never load a shelf with more than 3 pounds without using a nail to secure
- Remember to always use common sense when using any tool

